



## Туре

- § 4 Stroke
- § Air Cooled
- § V Twin
- § Overhead Valve
- § Vertical Shaft

## Features

- § 90 degree V-twin
- **§** Automatic compression release
- § Cast iron cylinder liners
- § Dual stage canister air filter
- § Electronic spark ignition
- § Heavy duty shift type starter
- § High performance lubrication system
- § Metal engine cover
- § Overhead V-valves
- § Rotating grass screen

§ Twin barrel, internally vented carburetor with fuel shut-off solenoid

Options

**Technical Specifications** 


**FX Series** 

**FX730V** 

§	Engine Type	Air-cooled, 4-stroke, V-twin, Vertical shaft, OHV
§	Number of cylinders	2
§	Bore x stroke	78 x 76 mm
§	Displacement	726cm <sup>3</sup>
§	Max. power	16.6 kW (22.2 hp) / 3600 rpm
§	Max. torque	54.3 Nm (40.0 ft.lbs) / 2000 rpm
§	Fuel tank capacity (litres)	
§	Oil capacity (litres)	2.1 litres
§	Dry weight	46.6 Kg
§	Dimensions (L x W x H) (mm)	479 x 448 x 565

## **Performance curves**

The power rating of this engine is the Net power rating tested on a production engine and measured in accordance with SAE J1349. Actual power output will vary depending on numerous factors, including, but not limited to, the operating speed of the engine in application, environmental conditions, maintenance, and other variables.

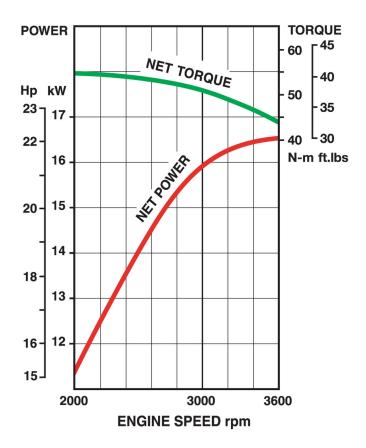



FX Series FX730V

